

TORC | TECH



Hydraulic Torque Wrenches

Low Clearance Hydraulic Torque Wrenches

230-44.500 Nm



- » Torque tightening accuracy: $\pm 3\%$
- » Capacity range: 230 - 44,500 Nm
- » Working pressure: 700 bar
- » Cassette size range: 19 mm - 175 mm
- » $360^\circ \times 180^\circ$ multi-positional oil port
- » Quick-release coupling connections
- » Easily changeable ratchet and reducer
- » Designed for heavy-duty applications
- » Simple and usable with square & hex drives
- » Simple drive assembly, less downtime
- » Minimum thickness, maximum torque power

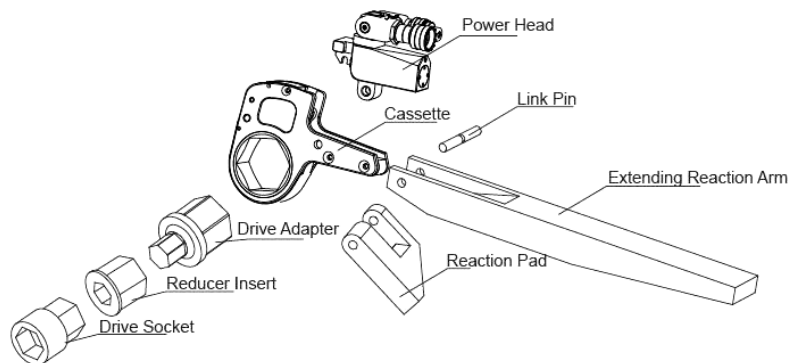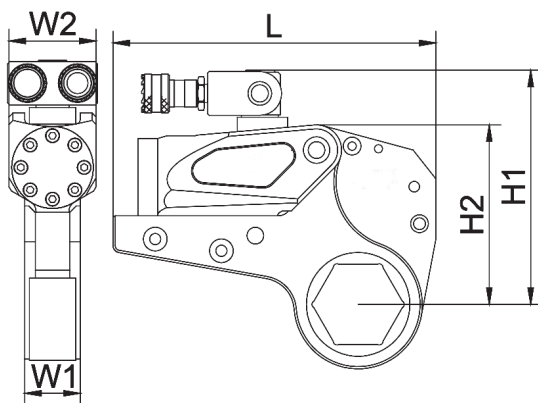

Model	Torque Range	Hexagon Size	Power Head	Ratchet	Dimensions (mm)				
#	N.m	mm	kg	kg	L	H1	H2	W1	W2
2 LOW	230 - 2.300	19~55	1	1.6	196	126	102.5	32	51
	240 - 2.400	60	1	1.7	196	129	105	32	51
4 LOW	580 - 5.850	34~65	2	4.4	245	177	138	42	66
	645 - 6.500	70~80	2	4.6	246	187	146	42	66
8 LOW	1.095 - 10.940	41~95	3.3	8	300	207	169	53	83
	1.175 - 11.500	100~105	3.3	8.4	301	216	178	53	83
14 LOW	1.850 - 18.500	50~117	5.5	11.6	361	239	204	64	99
30 LOW	4.180 - 41.800	85~155	11.4	29	430	303	272	85	131
	4.450 - 44.500	160~175	11.4	30	441	315	285	85	131


Accessories



Hoses



Couplings

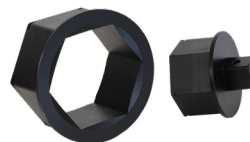

Adaptor



Torque Wrench Pump